

# AVS

Alternative Video Solutions, Inc.

3605 29th Ave. N.E., MINNEAPOLIS, MN 55418

Phone (612) 788-3605

## Unilumin UPADIII 4.8 - Outdoor or Indoor LED

Rear removable modules



Lightweight aluminum panels



Curveable LED




**“High Resolution waterproof Outdoor LED is finally here!”**

### Specifications

Pixel Pitch	4.8mm
Brightness	5500 Nits
Contrast Ratio	3000:1
Panel Dimensions	500mm x 500mm x 86mm - 19.69" x 19.69" x 3.39"
Weight	23 lbs/panel
Pixels per Panel	104x104
Viewing Angle (H/V)	140 degree H - 120 degree V
Refresh Rate	2880 Hz
Video frame rate	50/60 Hz
Ingress Protection Rating	IP65
Input Voltage	110 ~ 240 VAC
Power Consumption (Max @ 120V)	1.92 Amps/Tile
Power Consumption (Max @ 208V)	1.1 Amps/Tile
Rigging form	Hanging / Ground Support

**Extreme Rigging Flexibility: LED Screens can be flown or ground supported - Accessories available for either application**

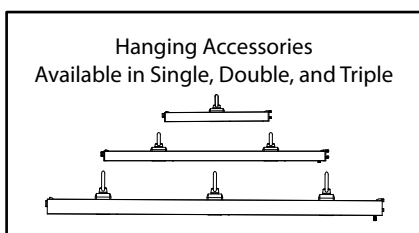

**Curveable LED!**  
**Convex Curve up to 5 degrees**  
**Concave Curve up to 10 degrees**

