




CERTIFIED
LUXEON
LUMINAIRE MANUFACTURER

ACCESSORIES

PLMBWLS10	10DEG Light Shaping Diffusion Kit.
PLMBWLS20	20DEG Light Shaping Diffusion Kit.
PLMBWLS30	30DEG Light Shaping Diffusion Kit.
PLMBWLS40	40DEG Light Shaping Diffusion Kit.
PLMBWLS60x1	60x1 linear Light Shaping Diffusion Kit.
PLMBWLS1X60	1 X 60 linear Light Shaping Diffusion Kit.

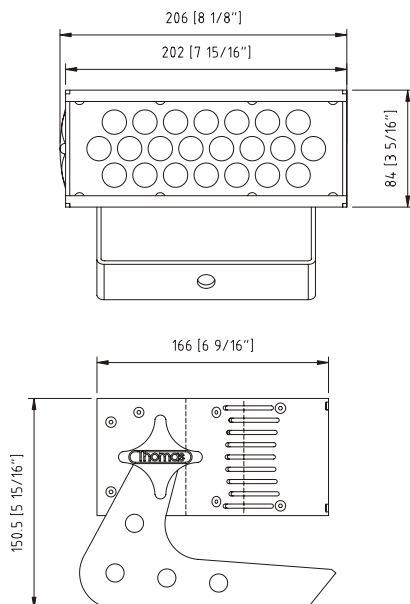

PixelLine Micro W

Features

- IP20 rating (dry location only)
- 22 high intensity K2 Luxeon emitters
- Red, Green, Blue, Amber or white, High quality, highest color binning
- Beam angle 6° conical as standard (other beam angles available to order)
- 4.2 billion color permutations

Preset Programming

- On board digital micro-processor with up to 29 channels of effects control, capable of more than 1000 effects
- Provides user with options to totally control effects (colors, chases, cycles, offsets, shutter, speeds and fades)
- High frequency strobing up to 28 frames per second (variable up to 10min)
- Independent DMX start address for the effects generator
- Programmable offset for synchronizing effects over multiple fixtures
- DMX 512 signal in/output with 8 or 16 bit RGB and RGBA modes
- Provides an alternative projection medium for video manipulation software

Control

- 4 digit alpha-numeric display indicates fixture address and menu functions
- Features real time readout display
- Control via external source or stand alone master/slave modes
- Default factory reset (simple 2 button reset)
- Features 7 modes of control (rgb, rgbM, +A, +A+M, 16BIT, FX (effects E1 or and E2) MCOL (manual mode)
- DMX 512 input and output via 5 pin XLR
- RDM ready
- Selectable DMX address

Cooling

- Internal forced air convection cooling (ultra quiet fan)

Construction

- Robust suitable for both temporary and permanent applications

Finish

- Powder coated black (other colors available to order)

Weight

- With yoke 5lbs (2.2kgs)
- Without yoke 4.2lbs (1.9kgs)

Dimensions

- Length 8.07" (205mm)
- Height 3.3" (84mm)
- Depth 6.57" (167mm) without yoke 6.16" (157mm)

Electrical

- Auto ranging 100-250 vac power supply 50-60 hz
- Max power consumption is 60 watts (0.5 amps @ 110v at full intensity)
- Power via a Powercon 20A connectors, power can be daisy chained
- Data via 5pin XLR chassis mounted connectors, data can be daisy chained

PART NUMBERS IP20 (dry) fixture

PLMBW PixelLine Micro Wash (black)
PLMBY PixelLine Micro yoke

THIS IS NOT A UL LISTED PRODUCT