

Unilumin UPADIII 2.6 - Indoor Only

Lightweight aluminum panels



Rear removable modules




"2.6mm LED is here. Finally High enough resolution for small text!"

Specifications

Pixel Pitch	2.6mm
Brightness	1200 Nits
Contrast Ratio	5000:1
Panel Dimensions	500mm x 500mm x 86mm - 19.69" x 19.69" x 3.39"
Weight	22 lbs/panel
Pixels per Panel	192x192
Viewing Angle (H/V)	140 degree H - 120 degree V
Refresh Rate	2880 Hz
Video frame rate	50/60 Hz
Ingress Protection Rating	IP30
Input Voltage	110 ~ 240 VAC
Power Consumption (Max @ 120V)	1.6 Amps/Tile
Power Consumption (Max @ 208V)	.8 Amps/Tile
Rigging form	Hanging / Ground Support

Extreme Rigging Flexibility: LED Screens can be flown or ground supported - Accessories available for either application

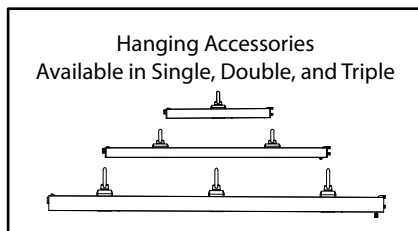

Curveable LED!

Convex Curve up to 5 degrees



Concave Curve up to 10 degrees

